

Here's what's coming:

Expect in your region by June 18, 2014*



Walk-On Graphics® Installation Instructions

Recommended floor surfaces for applying Walk-On Graphics:

- Tile Floors
- Sealed Concrete
- Waxed Vinyl
- Ceramic Tile
- Sealed Wood

Floor surfaces must be clean, secure and in good condition.

Applying Floor Graphics

We recommend spraying the floor with water mixed with a few drops of liquid soap and following these steps:

STEP 1: Remove the release liner from the back of the graphic and position it on the desired location of the floor.

STEP 2: Lift one edge of the decal. Using a squeegee with overlapping strokes, apply pressure from the middle toward the edge of the decal.

NOTE: It is very important that all edges and corners are applied with firm pressure. When more than one panel is used, butt the edges together. **Never overlap the decals.**


After application is completed, do not polish decals or surrounding floor for 24 hours. If the edges lift at all from the floor, the decal must be removed immediately and replaced. This is to prevent any accidents or tripping.

Maintenance

Walk-On Graphics should be maintained using normal floor maintenance procedures.

Removal

Remove the Walk-On Graphics decal by lifting one edge and pulling at a sharp angle using short, sharp strokes until the decal is up. Floor decals are meant to be semipermanent. In certain cases, additional adhesive removal products may be required to uninstall the item. If the decal is applied to a waxed floor, we recommend the floor be rewaxed.

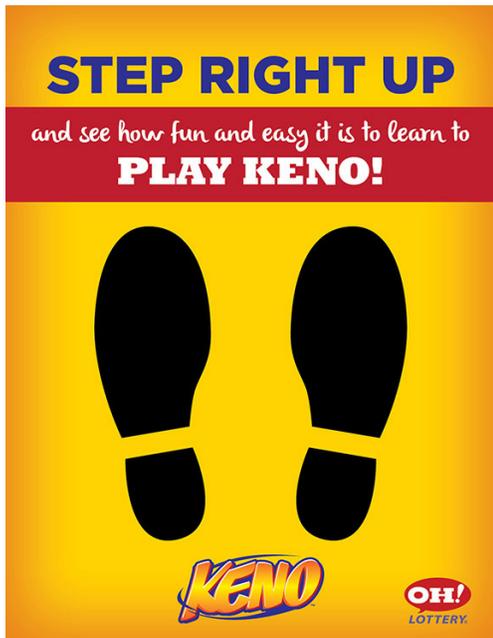

*If packages do not arrive by this date, please contact Marketing Services at 216-774-5688.



ohiolottery.com

